

Conventional Manual Call Point C-9201



Features and Benefits

1. Re-settable (non-breaking glass)
2. Additional volt free contact
3. Friendly installation and test

Description

Designed for the purpose of raising an alarm manually once verification of a fire or emergency condition exists, by pressing the non breakable glass. Meets the standard requirement of EN 54 part 11, European Standard and approved by Loss Prevention Certificate Board (LCPB).

The C-9201 constructed of high impact red ABS with a modern pleasing appearance. The terminating back box enables first fix installation and termination leaving the fascia with integral electronics to be simply plugged into base at the time of commissioning. Non breakable glass that can be reset with the GST standard reset sucker.


The C-9201 operated via a micro-switch that when pressed a signal will be transmitted and the volt free contact will be latched. Contain integral LED indicator to denote operational mode.

Selection of compatible Control Panels

Compatible with all GST Conventional panels

Wiring and Connection:

Connect as per the marking on the base.

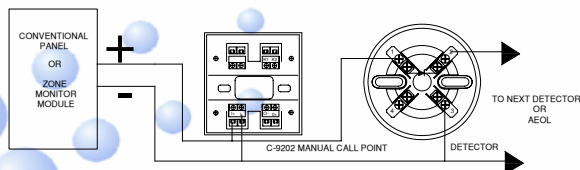


Technical Specifications

- Standard: EN54-part 11
- Approval: CE
- Protection rating: IP 40
- Operating voltage: 24Vdc Loop
- Operating current:
 - Standby current 0.8mA
 - Alarm Current 2mA
- Operating temperature: -10°C to +50°C
- N/O Output contact: 60Vdc, 0.1A
- Contact resistance: 100mΩ
- Relative humidity: 95%
- Application: Indoor use
- Visual Indicator: LED, Red (lit steady when alarm, 3 sec interval blinking at normal state)
- Material and colour: ABS, red
- Wiring: 1 pair polarized
- Dimensions: 90x122x48.5mm

Mounting Base

The location of manual call point should be installed in compliance with all local codes and / or NFPA 72 National Fire Alarm Code, NFPA 70 National Electrical Code. Surface mount and it is installed onto a standard

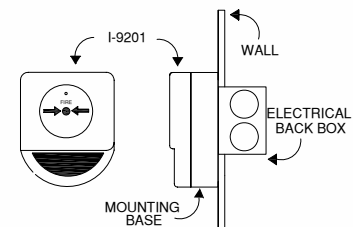

SURFACE MOUNT

one gang electrical box with a mounting hole that have 52mm~68mm spacing.

Ordering Information:

Part No	Description	Weight/Kg	Pack Qty per Box
C-9201	Conventional Manual Call Point	0.156	120

Note: Specifications are subject to change without notice.

GST England Lion Court, Staunton Harold Hall, Melbourne Road, Ashby de la Zouch, Leicestershire, England LE65 1RT Tel: +44 1283 225 478 Fax: +44 1283 220 690

GST Dubai ZA04, Jebel Ali Free Zone, P.O.Box 17998, Dubai UAE Tel: +971 (0)4 8833 050 Fax: +971 (0)4 8833 053

GST China 80, Changjiang East Road, Economic & Technology Development Zone Qinhuangdao, Hebei, China Tel: +86(0)335 850 2383 Fax: +86 (0)335 850 7588

