

Addressable Gas Detector I-9602LW



Features and Benefits

1. Build-in microprocessor
2. Self-diagnosis function can monitor the inner fault.
3. Built-in relay contacts for control Gas Valve/Extract etc.
4. Built-in Sounder
5. Manual reset and control of relays contact.
6. Electronically addressed
7. Wall mounting. Easy installation and connection.
8. Available in LPG, Coal Gas and natural Gas

Description

I-9602LW Addressable Gas Detector is suitable to detect liquefied petroleum gas in such areas as houses, hotels and apartments. This detector is available for different application such as LPG, Natural Gas and Coal gas. (Please specify at the time of order).

The detector adopts semiconductor gas sensitive components enabling stable operation and simple installation. It's powered by centralized DC24V that can be connected with GST fire alarm controller by non-polarized two-wire, to form a loop type fire alarm system together with other detectors. It has two alarm levels: level 1 and level 2.

Technical Specifications

- Protection rating: IP30
- Operating Voltage:
Loop Voltage: 24V
Range Allowed: 16V 27V
Power Bus Voltage: DC24V
Range Allowed: DC16V DC30V
- Operating Current:
Standby Current: 80mA (power bus); 2.7mA (signal bus)
- Alarming Current: 100mA (power bus) ; 5.2mA (signal bus)
- Output Capacity and Control Mode:
A group of one-way DC pulse active contact (1000µcapacitance discharge).
- A group of passive normally open contact.
- Alarm Density:
Level 1 3080ppm (14% LEL)
Level 2 4400ppm (20% LEL)
- Indicators:
- Power Supply LED: Green constantly lit in operation.
- Alarm LED: Red, flashes per 4s-5s in polling.
- Flashing frequency is about 1Hz in level 1 and about 3Hz in level 2.
- Fault LED: Yellow, constantly lit when in fault.
- Programming Mode: Electronic programming within 1-242.
- Life of Sensor: 5 years
- Operating Environment:
- Temperature: 0°C~ +50 °C
- Relative Humidity≤95%, no condensation
- Dimension: 176mm×80mm×45mm
- Material and Color of Enclosure: ABS, ivory white
- Signal two-wire, non-polarized.
- Weight: 230g
- Mounting Hole Distance: 156mm





www.gst.uk.com
info@gst.uk.com




Global System Technology PLC
The Intelligent Solution

Addressable Gas Detector I-9602LW


Mounting Gas Detector

The installation of gas detector should comply with all local codes and / or NFPA 72 National Fire Alarm Code, NFPA 70 National Electrical Code. Designed to install onto standard conduit electrical box (70mmx70mm). Recommended location of the detector is show below.

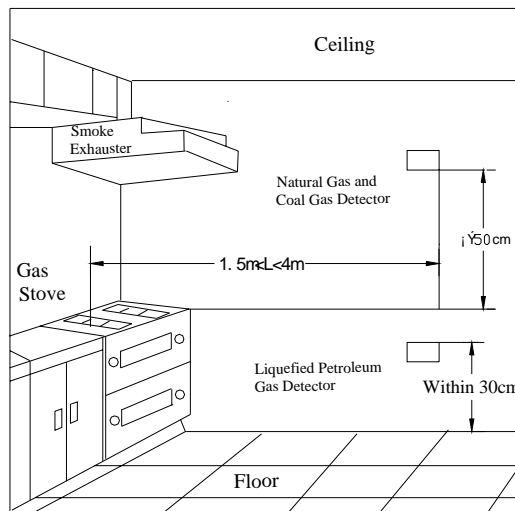


Wiring and Connection

Connect the wires to the required terminal according to the wiring diagram. D1, D2: To power bus, non-polarized. Z1, Z2: To signal bus, non-polarized. V1, V2: To pipe pulse solenoid valve, when the detector alarms, there is a forward 12V pulse between V2 and V1 (V2 is + and V1 is -).

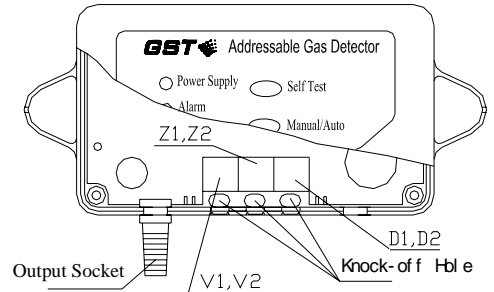

Programming

The address gas detector can be programmed using GST handhold programmer (P-9910), purchased separately. Connect the two wires of the handheld programmer to terminals Z1 and Z2 of the detector.

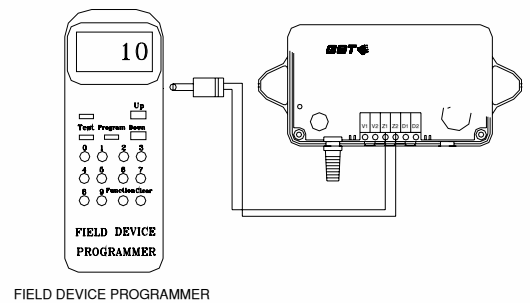

Selection of compatible Control Panels

Compatible with all GST Intelligent control panel.

Ordering Information:

Part No	Description	Weight /Kg	Pack Qty per Box
I-9602LW	Addressable Gas Detector	.230	100

GST England Lion Court, Staunton Harold Hall, Melbourne Road, Ashby de la Zouch, Leicestershire, England LE65 1RT Tel: +44 1283 225 478 Fax: +44 1283 220 690

GST Dubai ZA04, Jebel Ali Free Zone, P.O.Box 17998, Dubai UAE
Tel: +971 (0)4 8833 050 Fax: +971 (0)4 8833 053

GST China 80, Changjiang East Road, Economic & Technology Development Zone Qinhuangdao, Hebei, China Tel: +86(0)335 850 2383 Fax: +86 (0)335 850 7588