


PDC-1 EXPLOSIONPROOF MANUAL CALL POINT



SPECIFICATIONS


Type	Manual Call Point
Model	PDC-1
Structure	Explosion Proof Type
Explosion Proof Grade	Exd II BT4
Operating Voltage	500mA @24Vdc
Indication Lamp Voltage	21mA @24V AC/DC
Operating Temp. Range	-20°C to 50°C
Material	Aluminum Cast
Color	Munsell 7.5R3/12 (Medium gloss)
Weight	Approx. 5.8kg
Country of Origin	Japan
Approval	TIIS No. TC17205, JFEI
Ingress Protection Rating	IP65 (IEC60529)

DIMENSION

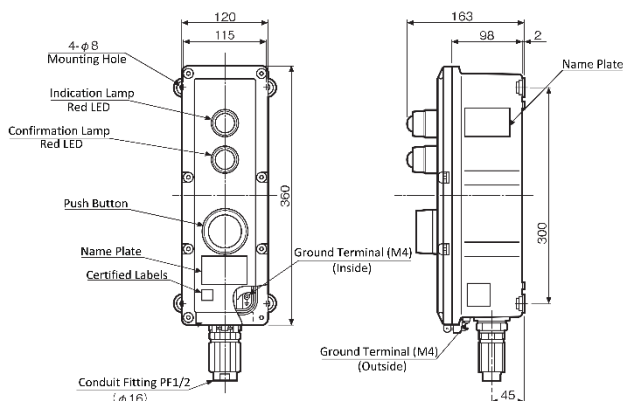

Unit: mm

Circuit Diagram

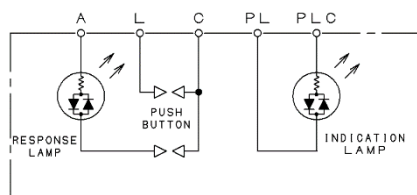

Specifications subject to change without notice

09/2017

HOCHIKI ASIA PACIFIC PTE. LTD.

71 UBI Road 1 #07-40/41

Oxley Bizhub Singapore 408732

TEL : 65-6841-9728 FAX : 65-6841-9781

URL : www.hochikisingapore.com

HEAD OFFICE

10-43 Kamiosaki 2-Chome. Shinagawa-Ku,

Tokyo 141-8660 Japan

TEL : 81-(3)-3444-4116 FAX : 81-(3)-3444-4167

URL : www.hochiki.co.jp