

CM-WSK701

Multipurpose Heat Detector


ISO9001
Approvals: CE



■ ADVANTAGES

- * The sensitive of fixed temp. heat detector head is stabilized performance, long-term durability and least malfunction are ensured by employing a bimetal mechanism(certificated by UL)
- * Mechanical operating principles ensure the long-term durability and the least malfunction
- * The exhaust valve of R.O.R. Heat Detector part uses optical fiber glass capillary tube that's heat-resistant and moisture-proof to avoid false alarms

■ DIMENSIONS

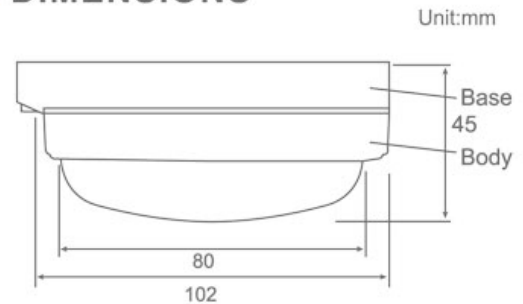

■ SPECIFICATION

MODEL NO.	CM-WSK701			SENSITIVITY SETTING	Comply to EN54, CNS
TYPE	2-wire	3-wire	4-wire	ALARM TEMP.	
VOLTAGE RANGE	12V ~ 30V DC			AMBIENT TEMP.	-10°C ~ +55°C
ALARM CURRENT	24V DC 30mA			AMBIENT HUMIDITY	0 ~ 95%
CONTACT RATING	N/A		1A @30V DC	MATERIAL	Fire-Proof plastics
POLARIZATION	Non-polarized	Polarized	Non-polarized	DIMENSIONS	102 (Dia.) × 45(H)mm
COLOR	White			WEIGHT	132g

■ EFFECTIVE ALERT AREA

HEIGHT/CONSTRUCTION	UNDER 4 M	4M ~ 8M
Fire-Proof Building	70 M ²	35 M ²
Ordinary Building	40 M ²	25 M ²

■ ORDER INFORMATION

CM-WSK701-31	3-wire with remote indicator output
CM-WSK701-31H	3-wire with self-protection
CM-WSK701-41	4-wire with relay output