

CM-WTK55

Combination Smoke and Heat Detector


ISO9001
Approvals: CE



ADVANTAGES

- * Multi-purpose Design: when there is smoke or heat during pre-fire period, field situation will vary due to different environments. This combination design is to ensure that the pre-fire confirmation will not be affected by varying environments
- * This detector has passed strict quality control and repetitive testing, hence its quality is stable and highly reliable

Unit:mm

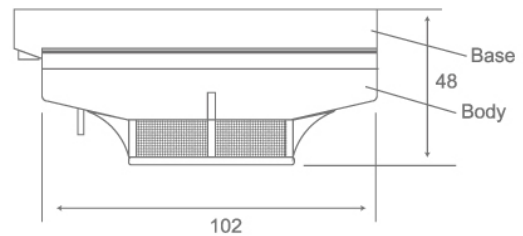

SPECIFICATION

MODEL NO.	CM-WTK55			SENSITIVITY SETTING	Comply to EN54, CNS
TYPE	2-wire	3-wire	4-wire	ALARM TEMP	
VOLTAGE RANGE	12V ~ 30V DC			AMBIENT TEMP	-10°C ~ +55°C
ALARM CURRENT	24V DC 30mA			AMBIENT HUMIDITY	0 ~ 95%
CONTACT RATING	N/A		1A @30V DC	MATERIAL	Fire-Proof plastics
STANDBY CURRENT	24V DC / 25 µA Below			DIMENSIONS	102 (Dia.) × 48(H)mm
POLARIZATION	Non-polarized	Polarized	Non-polarized	WEIGHT	140g
				COLOR	White

EFFECTIVE ALERT AREA

HEIGHT/CONSTRUCTION	UNDER 4 M	4M ~ 8M
AREA COVER	150 M ²	75 M ²

ORDER INFORMATION

CM-WTK55-31	3-wire with remote indicator output
CM-WTK55-31H	3-wire with self-protection
CM-WTK55-41	4-wire with relay output

CM CHUNG MEI FIRE FIGHTING SUPPLIER CO.,LTD

CATALOG NO. CM-WTK55-EA