


P-2 TYPE FIRE ALARM CONTROL PANEL: RPP-EDW (03, 05) (JE)



DIMENSION

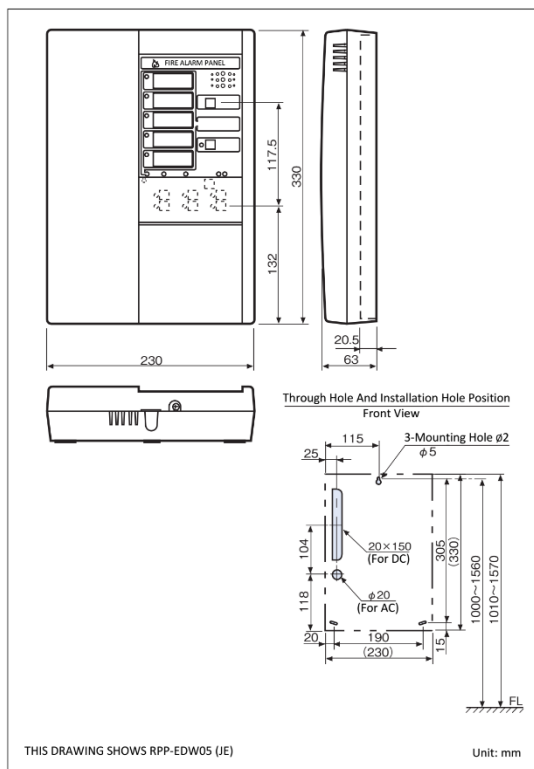

STANDARD FEATURES

- Versatile zone configuration to suit various requirement
- Light weight and compact in size
- Time delay function

		P-2 Type Fire Alarm Control Panel (Time Delay Type)		
Product code		RPP-EDW03 (JE)	RPP-EDW05 (JE)	
Number of zone		3	5	
Circuit type		RPP-E24F		
Main power		AC220V 50/60Hz		
Transformer rating		23VA		
Battery capacity (Nickel cadmium battery)		DC12V, 0.6Ah		
Power consumption	Monitoring (max.)	9VA		
	Operating (max.)	22VA		
Detector circuit voltage		24V (nominal)		
Number of devices connected (Typical model names)	Smoke detector	Max. 30 units/zone (17 units/zone in average of all zones)		
		63 units/ All zone	105 units/ All zone	
	SPC-ET (Beam detector)	5 units/zone (Emitter separate power supply), 2 sets/zone		
	Heat detector	No limit (contact type)		
	Local sounder device	8mA bell	12 units (DC24V, 100mA)	
		13.5mA bell	6 units (DC24V, 100mA)	
Indication lamp	9mA LED	22 units (DC24V, 210mA)		
	19mA LED	10 units (DC24V, 210mA)		
Repeater panel		1 unit (Model: PEX-□H Type)		
Typical delay time		Typical delay time 50 s (Heat: Within 20 s, Smoke: Within 50 s)		
Delay system		Per-zone Temporary reset system		
Main alarm		Buzzer (DC24V, 25mA)		
External signal transfer	General fire alarm signal transfer	1c x 1 point (DC30V-1A)		
		1a x 1 point (DC30V-1A)		
	Manual call point signal transfer	1a x 1 point (DC30V-1A)		
Zone-signal transfer		Open-collector output x number of zones (Compatible with PEX-□H Type)		
External wire resistance		Detector line (L-C) 50Ω or less		
End of line resistor		10kΩ		
Operating temperature range		0°C to 40°C		
Material		Self-extinguishing resin (ABS) Thickness 3mm		
Color		Original light gray (Munsell value 5GY8.5/0.4 approximate color)		
Dimension		(W)230 x (H)330 x (D)63 (mm)		
Weight		Approx. 1.7 kg		
Accessories		Battery, Instruction Manual, Installation Manual, End of line resistor 10kΩ (Equivalent to the number of zones) and Fuse clip		
Spare part		Fuse: 3 pcs. Each		
Country of origin		Japan		

Specifications subject to change without notice

HOCHIKI ASIA PACIFIC PTE. LTD.

71 UBI Road 1 #07-40/41
 Oxley Bizhub Singapore 408732
 TEL : 65-6841-9728 FAX : 65-6841-9781
 URL : www.hochikisingapore.com

HEAD OFFICE

10-43 Kamiosaki 2-Chome. Shinagawa-Ku,
 Tokyo 141-8660 Japan
 TEL : 81-(3)-3444-4116 FAX : 81-(3)-3444-4167
 URL : www.hochiki.co.jp