

CM-WK200L

Fixed Temperature Heat Detector

ISO9001
Approvals: CE




■ ADVANTAGES

- * Stabilized performance, long-term durability and least-malfunction are ensured by employing a UL approved sensor
- * The sensitive part is enclosed to prevent from being moistened and contaminated
- * Self-restoring function ensures the elements repeatedly use

■ DIMENSIONS

Unit:mm

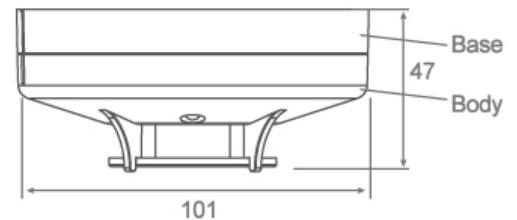

■ SPECIFICATION

MODEL NO.	CM-WK200L	AMBIENT TEMP.	-10°C ~ +55°C
TYPE	2-wire	AMBIENT HUMIDITY	0 ~ 95%
VOLTAGE RANGE	12V ~ 30V DC	MATERIAL	Fire-Proof plastics
ALARM CURRENT	24V DC 30mA	DIMENSIONS	101 (Dia.) × 47(H)mm
POLARIZATION	Non-polarized	WEIGHT	100g
ALARM TEMP.	Comply to EN54, CNS	COLOR	White

■ EFFECTIVE ALERT AREA

HEIGHT/CONSTRUCTION	UNDER 4 M	4M ~ 8M
Fire-Proof Building	60M ²	30M ²
Ordinary Building	30M ²	15M ²