

CM-WK24L

Fixed Temperature Heat Detector

ISO9001

Approvals: CE




■ ADVANTAGES

- * Dual LEDs for 360-degree visibility
- * Stabilized performance, long term durability and least-malfunction are ensured by employing a UL approved sensor
- * The sensitive part is enclosed to prevent from being moistened and contaminated
- * Self-restoring function ensures the element repeatedly use

■ DIMENSIONS

Unit:mm

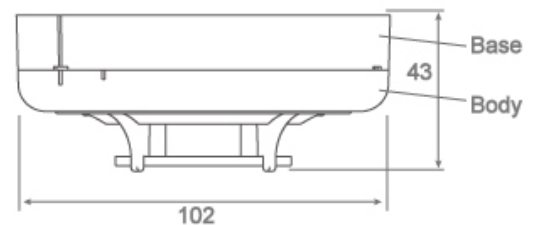

■ SPECIFICATION

MODEL NO.	CM-WK24L	CM-WK24LR	SENSITIVITY SETTING	Comply to EN54, CNS
TYPE	2-wire	3-wire	AMBIENT TEMP.	-10°C ~ +55°C
VOLTAGE RANGE	12V ~ 30V DC		AMBIENT HUMIDITY	0 ~ 95%
ALARM CURRENT	24V DC 30mA		MATERIAL	Fire-Proof plastics
POLARIZATION	Non-polarized	Polarized	DIMENSIONS	102 (Dia.) × 43 (H)mm
WEIGHT	109g		COLOR	White
REMARK	Apply to base model no. CM-BSN3			

■ EFFECTIVE ALERT AREA

HEIGHT/CONSTRUCTION	UNDER 4 M	4M ~ 8M
Fire-Proof Building	60M ²	30M ²
Ordinary Building	30M ²	15M ²